


SECTION CONTROL

The Concord logo features a stylized globe icon to the left of the word "concord" in a bold, lowercase, sans-serif font. The globe icon is composed of several curved segments in shades of red and white, creating a three-dimensional effect.

## **TECHNOLOGICALLY ADVANCED.**

Section control with ZoneRight™ meter modules is **available on the 5250 and 3800 air carts**. It supports four sections of up to three dry products through single or double shoots. The sections automatically turn on and off to eliminate double seeding and fertilizing in areas that have already been seeded and/or fertilized along field edges, headlands and in irregular-shaped fields. Compared with competitive systems, Concord's four sections offer the ideal balance of seeding efficiency and machine return on investment.

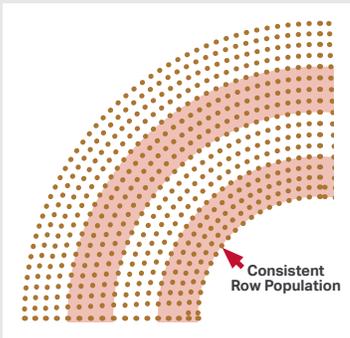

### **Curve Compensation**

Curve compensation is provided with the section control system to automatically adjust the flow rate of each section around turns and curves. For example, as a machine seeds around a left-hand curve, the meters deliver seed and fertilizer at a reduced rate to the left-hand sections, while speeding up the rate to the right-hand sections. The result is a uniform seed and fertilizer rate across the width of the seeder and throughout the entire field.

**OUR LEGACY. YOUR FUTURE.**



### **ZoneRight™ Meter Modules**

Concord's poly ZoneRight meter modules offer a simple, practical and highly efficient design for metering seed in carts equipped with optional section control. The individual electric-driven meters start and stop material flow to the airstream when needed, rather than using gate shutoffs, to eliminate dumping of material when sections are turned on and off. ZoneRight electric meter modules feature smart technology to help prevent jamming and deliver precise material flow to each section. They also allow operators to easily modify material delivery from the three tank compartments for single or dual airstream applications.



### **Maximum Versatility**

Low volume or high volume, one product or three products, Concord carts offer great versatility. Easily swap out different modules or seed rollers for low or high volume product under any of the three separate tank compartments, allowing one, two or three different products to be applied at the same time.



### **Easy Access**

The doors on the ZoneRight meter system open by simply flipping the side handle, and no tools are required for swapping air streams. The meter dump also requires no tools to access. Just flip a handle to access the system when emptying tanks or performing calibration. A remote calibration keypad further simplifies this process, allowing the operator to enter data while at the meters, instead of returning to the virtual terminal in the tractor cab.



### **Single or Dual Airstream**

Choose between single or dual airstream. Two airstreams can be used to deliver product from any combination of the compartments to different locations on the machine.